



GENERAL SHEET NOTES

1. REFER TO SHEET S-1 FOR GENERAL STRUCTURAL NOTES.
2. REFER TO SHEET S-2 FOR STRUCTURAL TYPICAL DETAILS.
3. COORDINATE WITH THE MECHANICAL AND ELECTRICAL DRAWINGS FOR THE SIZE AND LOCATIONS OF SLAB AND WALL PENETRATIONS, AND FOR THE LOCATIONS OF EQUIPMENT PADS.
4. WALL SLEEVES FOR PIPING, ACCESS HATCH FRAME AND OTHER INSERTS MUST BE CAST INTO THE STRUCTURE AT THE PLACE OF MANUFACTURE.
5. DETERMINE AND SUBMIT FOR APPROVAL EXACT LOCATIONS AND QUANTITIES OF PIPE SUPPORTS REQUIRED.

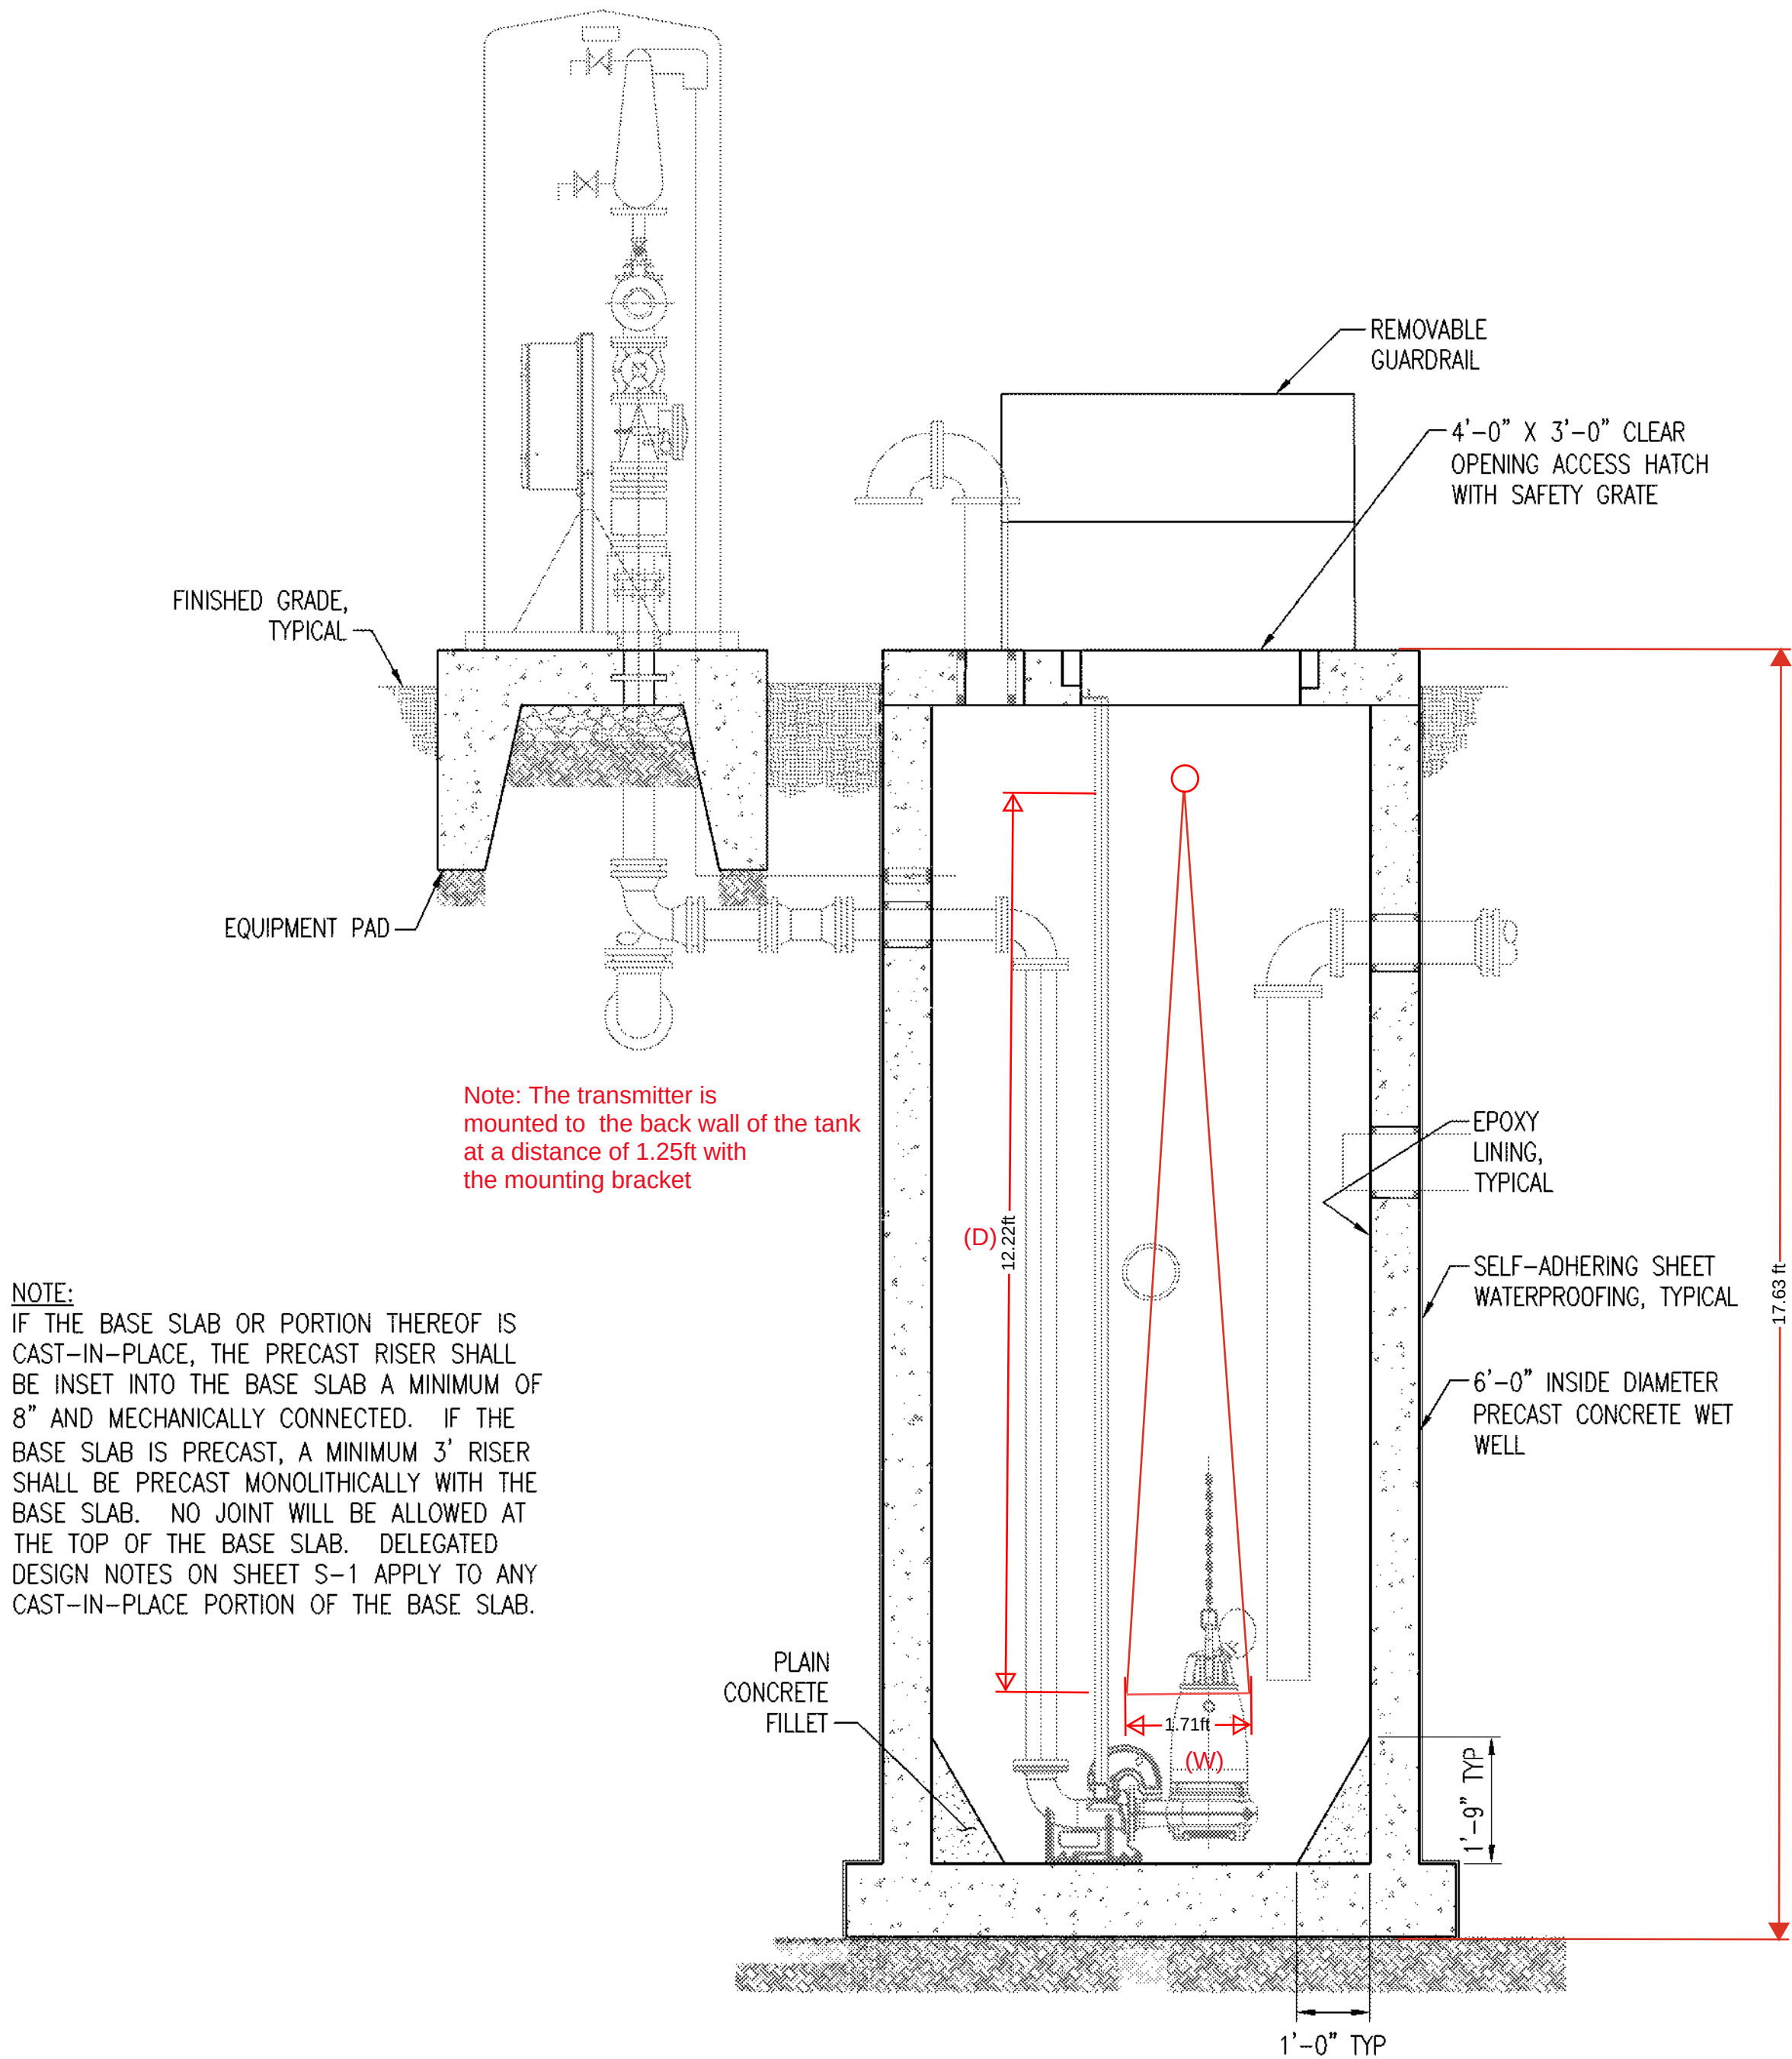

A
S-4
1/2" = 1'-0"
REF: S-3



W=D*0.14
W=12.22*0.14
W=1.71ft

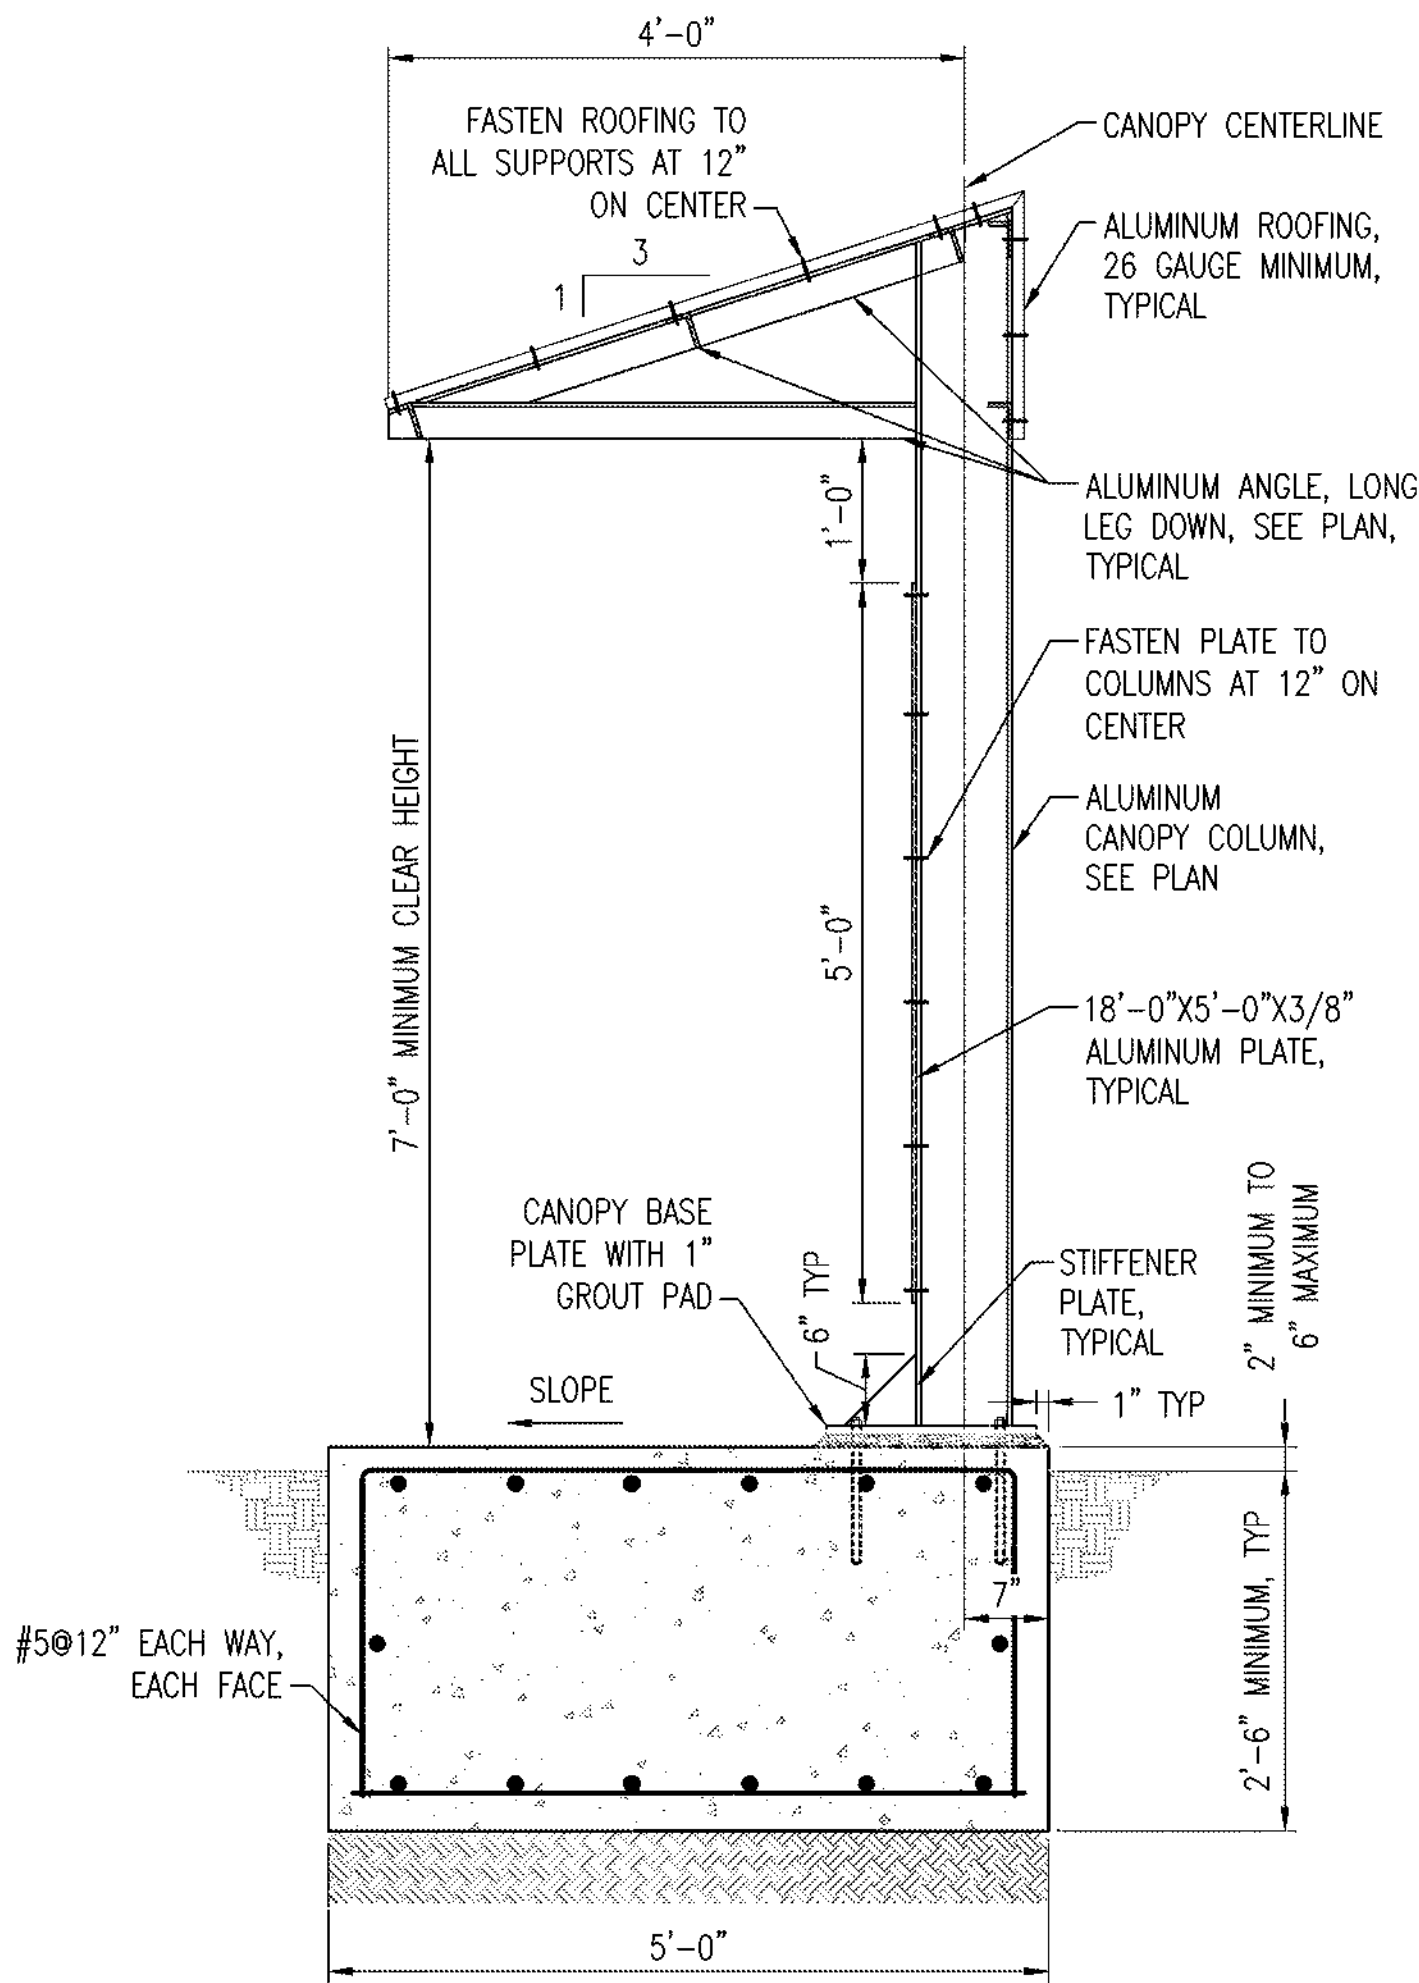

- NOTES:
1. ALL CANOPY FRAMING MUST BE ALUMINUM.
2. FASTEN PLATES TO FRAMING WITH TYPE 316 STAINLESS STEEL SELF DRILLING SCREWS.
3. PROVIDE FULLY WELDED CONNECTIONS AT ALL CANOPY FRAMING CONNECTIONS WITH 3/16" MINIMUM ALL AROUND FILLET WELDS UNLESS NOTED OTHERWISE, COPE ANGLES AS NECESSARY FOR FIT UP.
4. SLOPE THE TOP OF THE CONCRETE SLAB AWAY FROM THE CANOPY CENTERLINE AT 1/4" PER 1'-0".

B
S-4
3/4" = 1'-0"
REF: S-3

GRAPHIC SCALE

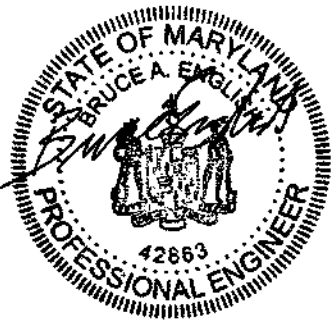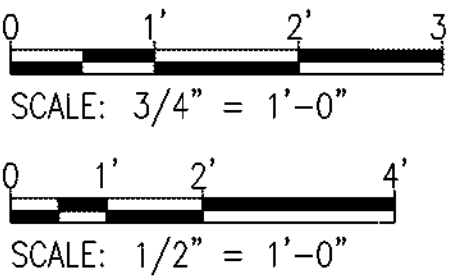

PROFESSIONAL CERTIFICATION. I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NO. 42863, EXPIRATION DATE: 12/2/2024.

OWNER:
CHARLES COUNTY GOVERNMENT, DPW
5310 HAWTHORNE ROAD
LA PLATA, MARYLAND 20646
301-609-7400 301-753-8270

PROJECT NO.
UN-1219

POMONKEY PUMP STATION IMPROVEMENTS
STRUCTURAL SECTIONS AND DETAILS

CHARLES COUNTY, MARYLAND
ELECTION DISTRICT NO. 6

NO.	CONSTRUCTION REVISION		DATE
PROJECT NO. UN-1219			
SCALE AS SHOWN	SHEET S-4	DRAWING NO. 12 OF 26	WO:14475-006
			MAY 2024